

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number  
WO 2004/042670 A2

(51) International Patent Classification<sup>7</sup>: G08B 23/00

(21) International Application Number:  
PCT/IL2003/000918

(22) International Filing Date:  
6 November 2003 (06.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/424,725 8 November 2002 (08.11.2002) US

(71) Applicant (for all designated States except US): DBS SECURITY LTD. [IL/IL]; 104 Haegoz st., 45915 Neve Yarak (IL).

(71) Applicant and  
(72) Inventor: ZEHAVALI, Eyal [IL/IL]; 104 Haegoz st., 45915 Neve Yarak (IL).

(74) Agent: ZER, Yoram, ADV; 29 Lilinblum st., 65133 Tel Aviv (IL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CANINE SECURITY SYSTEM

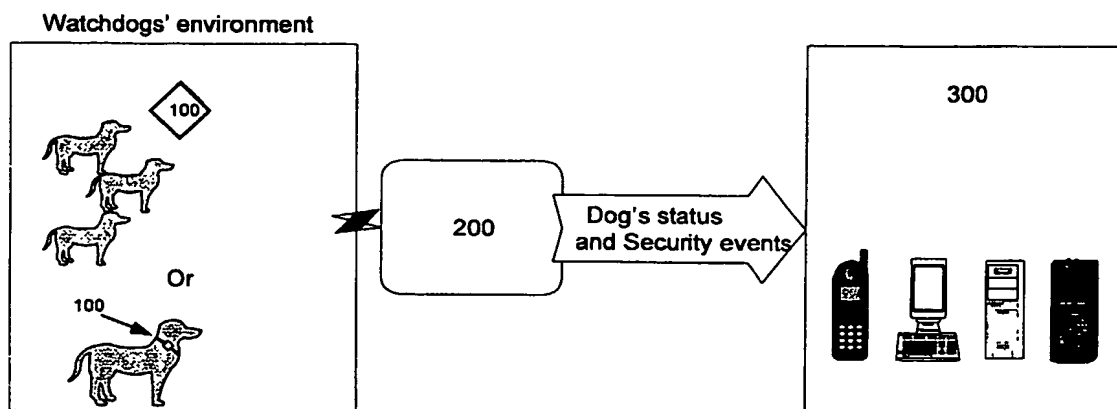

(57) Abstract: A computerized security system which enhances the security provided by watchdogs on a given premises by analyzing the auditory and physiological indications given by the dogs to assess the level of security at any point in time. By attaching sensors to the dogs and placing microphones in their proximity the system continuously collects information about the dogs' auditory and physiological behavior, and according to predetermined parameters it assesses the watchdogs' physiological and emotional state. Having concluded that any of the dogs sense a threat or has been neutralized in any way the system may update the state of security on the users' security terminals. The system determines between three possible security states: no alert when no irregular activity is registered, medium alert if the dogs indicate a state of moderate alertness and high incase there are indications for a definite hostile presence.

528,072

Rec'd PCT 17 MAR 2005

WO 2004/042670 A2

Rec'd PCT/PTC 17 MAR 2005

**CANINE SECURITY SYSTEM****BACKGROUND OF THE INVENTION**

5

The present invention relates to the field of premises security systems, and more specifically, to a computerized security system which incorporates the ability to interpret canines' (dogs) behavior. The use of dogs in securing premises is well known in the art since dogs have the natural ability to detect  
10 and react to suspicious activities in their vicinity.

There are many advantages to using dogs for securing premises besides having excellent detection abilities; dogs constitute a physical and a psychological deterring factor merely by their presence, or even just by the knowledge of their existence. In addition to providing a visible presence that  
15 deters potential criminal activity, they can abort such activities and detain any persons involved. Dogs may also be trained for specific and even highly complex security missions and can therefore answer special security needs.

In spite of their many advantages, dog-based security systems also have their shortcomings. For a dog-based security system to be effective, security  
20 personnel need to be in reach of the dogs for constant check-up and within hearing distance. For this end some systems make use of close-circuit surveillance systems providing full visual and audio coverage of the secured areas, which make them costly and complex systems.

An additional problem with dog-based security systems is that dogs tend  
25 to bark for different reasons, not always for the purpose of indicating threat.

Dogs may bark due to the appearance of an animal, at other dogs or at a friendly caretaker. Frequent barking may, at first, cause many false alarms and, in time, may cause the guards to unintentionally decrease their level of alertness.

5        A third problem stems from the fact that the dogs are vulnerable to direct attacks by weapons or by use of toxins – they can be shot and killed, drugged or poisoned. For such scenarios is required a Dog-based security systems which rely upon direct and constant visual contact between the guards and the dogs.

10       There is therefore a need for security systems that integrate automatic means into dog-based security methods. Such systems can then be attentive to indications given by the dogs and analyze them into readings of level of alarm. These systems then also monitor the state of the dogs on watch, and can activate an alarm whenever an attempt to hurt the dogs is made.

15       New developed applications for interpreting dogs' behavior are designed for the purpose of improving the communication between pet-dogs and their owners. Such a device is disclosed in Japanese Patent No. JP3083915, which attempts to interpret a dog's barks and cries and translate it to predetermined expressions of emotions and needs. The device includes a voice pattern for  
20 each dog type. Based on comparing dog barking patterns to a database of barks, the device is supposed to "translate" the dog's vocal expressions into a range of terms.

This patent is particularly aimed for leisure purposes not requiring high reliability of identification and is thus unsuitable for security systems, which

require accurate recognition of the dog's sensed level of alarm. Furthermore, there are some major and fundamental technological differences:

- The sound analysis method utilized in this patent addresses the sound characteristics of a single bark only, which limits the analysis accuracy.
- Each sound pattern is compared to patterns in a preprogrammed database.
- The device has preferably to be adjusted to work with specific dog type.
- The device relies solely on audio signals, without making use of physiological parameters.

There is therefore a need for a computerized dog-based security system that can translate vocal and physiological indications given by dogs, to the security alarm level.

## SUMMARY

A security system and method for alerting of security situations based on watchdogs' behavior which operates according to collected and analyzed auditory and physiological data from the dogs. This system is comprised of sensors for sampling dog sounds in the watchdog's vicinity, of means for collecting physiological data attached to the dog's body or implanted in it, and of means for processing the collected data and for identifying an alert situation. The audio data is converted to digital form and amplified by analog to digital converter and amplifier. The system then differentiates between different signal sources and identifies single barks sounds in accordance with received measurements. The system is also comprised of a means for identifying characteristic sound signal patterns and determining alert level by comparing the sound patterns to predefined values. Physiological data which

include heartbeat rate, rate of breathing, muscle tonus, blood pressure and skin conductivity is also compared to predefined data and the dogs' state is estimated. According to valuated data the system assesses the level of security sensed by the dogs and in case of an alarming situation the user is notified via a security terminal unit.

In order to analyze the pattern of barking the system first filters background noises, distinguishes between barks from different sources and normalizes the signals. The sampled barks are then analyzed according to the characteristics of each single bark, such as the bark's frequency and pitch, and according to their characteristics over time such as measuring the mean and variant of time intervals, bark rate variability, barking rate and the distribution variance of the barks. The analyzing means may be embedded in the sensor means in the dogs' vicinity or remote, and the system therein includes of transmitting facilities for enabling connectivity between its different components.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic illustration of the system's flow of information.

Figure 2 is a block diagram of the Monitoring unit.

Figure 3 is a block diagram of the processing and analyzing unit.

Figure 4 is a flow chart of the system's sound pattern processing and analyzing algorithm.

Figure 5 is a flow chart of the physiological data monitoring and analyzing process.

Figure 6 is a flow chart of the decision module algorithm.

Figure 7 represents a variety of possible embodiments of the user's security terminals.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is a computerized dog-based security system which receives auditory and/or physiological signals from a single or a group of dogs on guard, analyzes them and gives indications as to the alert level according to the dogs' emotional state at any given point in time. The invention is a new and efficient means for integrating the many benefits and advantages of dogs (dogs) into an automatic interpretive security system.

The system receives auditory and/or physiological signals from dogs, performs a unique digital signal processing analysis, and provides an indication as to one of several possible system alert levels and events. At the heart of the system is a series of proprietary audio and physiological data processing algorithms, which digitally sample the signals, filter, identify and analyze the data profile according to predetermined parameters. It can detect the vitality signs of any specific dog, determine whether it is alive and awake, and measure its level of alertness. Based on this analysis, the system can provide a highly accurate estimation of the dogs' state of alertness in a specific location.

The preferred embodiment of the present invention as illustrated in figure 1 includes three principal units: a monitoring unit 100, a processing and analyzing unit 200 and the user security terminal 300. The monitoring unit 100 is positioned in close proximity to the dogs or attached to the dogs, it records and transmits the raw data to the processing and analyzing unit 200, which performs the analysis and transmits the dog's alertness level to the user security terminal 300.

Figure 2 illustrates the monitoring unit 100 that records and transmits vocal and physiological signals from the dogs. The audio signal-recording unit 110 is comprised of a sensor 111 for picking up the audio signal from the dogs. As illustrated in figure 1, the audio signal recording unit 110 may be attached or  
5 implanted to the dog or placed in its vicinity. The physiological sensor unit 120 records stress-related physiological indicators from the dogs' somatic system, such as heartbeat rate 121, blood pressure 122, breathing pace 123, body temperature 124 and gross motor activity 125. The physiological sensor unit 120 may be implanted in the dog or attached to its body. The monitoring unit  
10 100 is also comprised of a AC\DC power supply unit 130, a power saving unit 140 (an electrical consumption reduction and saving unit), and a communication interface 150 which transmits the signals from the monitoring unit 100 to the processing and analyzing unit 200, using a radio transmitter or other physical communication methods. (Units 200 and 100 may be joined  
15 together to form one physical unit)

Figure 3 illustrates the processing and analyzing unit 200. This unit 200 receives the data from the monitoring unit 100, processes and analyses it and transmits the output data to the user security terminal 300. The unit monitors the state of the dog and analyzes whenever the dog experiences an alarming  
20 situation. The processing and analyzing unit 200 may be embedded into monitoring unit 100, into the user security terminal 300 or a standalone remote unit.

The processing and analyzing unit 200 is comprised of a signal receiver 210, an analogue to digital (A/D) converter and amplifier 220, a central processing  
25 unit 230 and a communications interface 240. The signal receiver 210

receives the signals from each sensor unit 100 and transfers these signals to the A/D converter 220. The converter 220 amplifies the analog signals and transforms the analog signals to digital signals. A central processing unit 230 executes the main processing and analyzing algorithms. It includes an audio  
5 processing and analyzing algorithm 231, a physiological processing and analyzing algorithm 232 and a security decision module 233.

The audio processing and analyzing algorithm 231 receives the auditory signals and analyses them, hence providing a calculated estimation of the dog's psychological condition indicating the dogs' alertness level. As  
10 illustrated in the flow charts in figure 4, the sound pattern processing algorithm module 231a processes the received signals, filters the environmental noise, and measures the energy level of several spectral bands of the audio signal. The algorithm module 231b analyzes the processed signals and identifies emotional parameters. The analysis is based on predetermined audio  
15 parameters, incorporates bark detection, an estimation of the bark's fundamental frequency (pitch) and temporal parameters including mean bark rate, time gap between barks, time variant of barks, and their intensity.

The physiological analyzing algorithm 232 processes (see Fig. 5) the received physiological signals from the sensor 120 and estimates the dogs'  
20 emotional state based on the physiological data, according to predetermined physiological parameters. In the preferred embodiment, the physiological data includes the dogs' heartbeat rate 121, blood pressure 122, , breathing pace 123, body temperature 124, and gross motor activity 125 , but it may also include other physiological data such as , muscles tonus, skin conductivity



and so on. Algorithm 232 analyzes these parameters for every sensor individually.

The security decision algorithm module 233 processes (see figure 6) the complete analyzed output data from algorithms 231 and 232 to determine the state of the dog. According to these readings, module 233 determines the current level of security and the nature of any security events. As previously mentioned, the processing and analyzing unit 200 also includes a communication interface 240 which is a communication unit component. This unit notifies the user security terminal 300 as to the:

- Occurrence of a security event;
- Dogs' state (asleep, dead, functional, level of alertness, etc.)
- System functionality

Figure 4 block 231a specifies the flowchart of pre-processing of audio data. The processing of the audio signal includes the following steps: first, the digital signal is passed through an array of digital band-pass filters (BPF) with varying frequency ranges and widths. This eliminates noise and measures the amount of signal energy at each frequency band. In order to maintain a standard and consistent framework along the time signal, the signal is then normalized to a given range  $(-1,1)$ , in an adaptive manner.

Thereafter, the system determines if the current time frame is a qualified frame by checking whether in the current time frame the signal contains any valid sound patterns. The decision is based on the output of the BPFs' energy levels. This saves analyzing resources since it prevents the system from redundant operation if the signal contains only silence or background noise. If

the frame is announced as having substantial data the process continues to the next stage.

Figure 4 block 231 b specifies the flowchart of analyzing the audio digital data. First a sound pattern is detected. The sound pattern detected relates  
5 mainly to bark sounds, but may also relate to other behavior characteristics such as breathing, sniffing or panting. The following description relates specifically to barking sounds, although the same analysis may be applied to other behavior patterns. The purpose of this analysis is to recognize barks when they occur and locate them on a time line. Looking for a specific  
10 amplitude pattern, which is typical to a dog's bark, achieves this purpose. The detected bark must also have a duration, which falls within predefined time limits, and have its amplitude above a certain level in order to be qualified as a bark. This step also helps the system to be more robust to various impulse and stationary noises. For each detected bark, the time-stamp of the bark  
15 peak and the peak value are recorded into a vector. Each bark segment is further normalized by its peak value; so all barks are comparable in under equal conditions.

The next step estimates the pitch or the fundamental frequency of a bark. In addition, it looks for stress signs in the dog's bark.

20 Three major features of the sampled signal are analyzed on the basis of pitch measurement: distinguishing between barks originating in response to threat and barks, which are a response to routine activity (such as play, trainer, patrol or a stray cat, etc.); distinguishing between barks coming from different dogs and ruling out any sounds which are not barks, such as human  
25 speech or shouts. If a certain bark successfully meets all of the requirements

of a valid bark, it is qualified and it remains in the bark vector. Otherwise, it is eliminated from the vector.

Then, clustering may be performed. The purpose of clustering is to classify the barks in the bark vector into groups that correspond to the possible sources of the audio signal. This classification is mainly done based on their pitch but it may also include other features. The source separation enables to distinguish between barks from different dogs. The clustering process further contributes to eliminating noise such as music, and human voices.

Finally, the clustered bark vector is analyzed statistically, calculating: the intervals between single barks, mean and variance of barking rate and barks distribution.

These statistic data, combined with the pitch and stress features are delivered to the final decision module 233. The decision module 233 receives features and parameters that characterize emotional and physiological behavior of the current time frame. The decision may result in determining that there is no alert, that the alert is at a medium level or that there is a high alert. Alert at a medium level might mean that there is some suspicious activity that needs attention, and high alert means that there is a definite territory intrusion, which may be an indication of a security breach.

At the same time the system can analyze every dog's physiological indicators, as received from the physiological sensor unit 120 as illustrated in figure 5. The physiological parameters are analyzed to determine the emotional state of the dog. The dog's state of alertness may be estimated by measuring different parameters of its somatic system. Being in a stressful situation

causes an increase in the heartbeat rate, in the systolic blood pressure, in the body temperature and in the breathing rhythm and depth. Monitored physiological parameters are categorized into three groups. Low rates on all indicators show that the dog is calm and that there is nothing attracting its attention in particular. A moderate increase in these parameters indicates that the dog is in a state of alertness due to an activity in its surroundings, which does not demand a special attention. High rates on these indicators show that the dog is in a state of stress and that an alarming situation has developed. In addition, measuring the dog's gross motor activity, taking into account its circadian activity rhythm and its general behavior patterns, can also help identifying irregular forms of reactions.

Integrating the information given by the analysis of the dog's auditory signals and its physiological status gives a highly accurate representation of the security status as it is sensed by the dog.

Monitoring the physiological status of the dog also ensures having a constant update on the well being of the dog and his performance relating to security matters. Any attempt to hurt a dog, whether successful or unsuccessful, will be immediately apparent and would activate the alarms.

The user security terminals 300 which are illustrated in figure 7 may include any set of integrated applications, including PC based security application 330, database and logging capabilities 350, user applications, security and alarm systems 360, an alarm transmission to Pagers 310, Mobile Phones or any other communication and notification devices 320. It may also integrate PDA's and mobile devices 340.

Additionally, the system can be easily adjusted to address specific needs, by training the dogs to react in a certain manner to specific situations and by translating the respective auditory and physiological indications of these reactions accordingly. By way of example, if, the dogs are trained to react

5 intensively to an approaching vehicle as opposed to any person approaching by foot, they might still bark if a person appears, but their reaction will be a moderate one and it will be interpreted as such by the system, whereas an approaching car will cause the dogs to give a stressful reaction and activate the alarm.

10 While the above description is very specific, these should not be construed as limitations on the scope of the invention, but rather as exemplifications of the preferred embodiments. Those skilled in the art will envision other possible variations that are within its scope. Accordingly, the scope of the invention should be determined not by the embodiment

15 illustrated, but by the appended claims and their legal equivalents.

What is claimed is:

1. A security system for alerting of security situations, said system based on at least one dog behavior, said system  
5 comprised of:

- at least one audio sensor for sampling dog sounds;
- analog to digital converter and amplifier;
- audio processing means for differentiating between different  
10 signal sources and identifying single barks sounds in  
accordance with received measurements;
- audio analyzing means for identifying characteristic sound  
signal patterns and determining alert level by comparing  
identified characteristics of sound patterns to predefined  
values;
- 15 - Security Terminal unit for notifying user of alert situations.

2. The systems of claim 1 further comprising of at least one  
biological sensor for measuring dog physiological status.

3. The system of claim 1 wherein the sound signal characteristics  
20 are signal time domain parameters.

4. The system of claim 3 wherein the time domain parameters and  
statistics of calculated time intervals between single barks  
25 signals include: mean and variant of time intervals, bark rate  
variability, barking rate and the distribution variance of the  
barks.

5. The system of claim 1 wherein the sound signal characteristics  
are signal frequency domain parameters.

6. The system of claim 5 wherein the frequency domain  
30 parameters include pitch measurement for identifying single  
sound pattern, differentiating between signal sources or  
determining alert levels.

- 5
7. The system of claim 5 or 3 wherein the identification of a single sound pattern is achieved by detecting a signal amplitude pattern in the time domain.
8. The system of claim 1 wherein the processing means include band-pass filtering module for excluding background noises and signal normalization module.
9. The systems of claim 1 wherein the sound pattern relates to barks.
- 10
10. The systems of claim 1 wherein the sound pattern relates to sniffing, panting, or breathing.
11. The system of claim 2 wherein the physiological status includes heartbeat rate.
12. The system of claim 2 wherein the physiological status further includes breathing rate, dog's gross motor activity, muscle tonus, skin conductivity and blood pressure.
- 15
13. The security system of claim 1 wherein the sensor unit, located at a distance from the processing, analyzing and control units, further includes communication means for transferring information between the units.
- 20
14. The security system of claim 1 and 2 wherein the sensor units are attached to the dog body.
15. The security system of claim 1 and 2 wherein the sensor units are located in the dog's vicinity.
16. The security system of claim 1 and 2 wherein the sensor units are implemented in the dog body.
- 25
17. A security method for alerting of security situations, said method based on at least one dog behavior, said method comprising the steps of:
- 30
- sampling dog sounds;
  - differentiating between different signal sources;
  - identifying single sound patterns in accordance to received samples;
  - identifying characteristics of sound pattern signals;

- determining alert level by comparing identified characteristics of signal sound pattern to predefined values;
- notifying user of alert situation.

- 5           18.       The method of claim 17 further comprising the steps of:  
measuring dog physiological status, processing physiological  
measurements and comparing to pre-defined values for  
determining alert situations.
- 10           19.       The method of claim 17 wherein determining alert levels  
includes analyzing time domain parameters.
20.       The system of claim 19 wherein the time domain parameters  
include time intervals between single barks sound pattern,  
barking rate, the distribution variance of the barks and bark rate  
variability.
- 15           21.       The method of claim 17 wherein determining alert levels  
includes analyzing frequency domain parameters.
22.       The method of claim 21 wherein frequency domain parameters  
include pitch measurement for identifying single sound pattern,  
differentiating between signal sources or determining alert level.
- 20           23.       The method of claim 21 wherein frequency domain parameters  
include signal amplitude pattern in the time domain.
24.       The method of claim 14 further including the steps of: filtering  
background noises, amplifying signals, and normalizing signal  
amplitude.
- 25           25.       The method of claim 18 wherein the physiological status  
includes heart beat rate.
26.       The method of claim 18 wherein the physiological status further  
includes breathing rate, gross motor activity, muscles tonus,  
skin conductivity and blood pressure.
- 30           27.       The method of claim 17 wherein the sensor units are located  
at a distance from the processing, analyzing and control  
units further includes the step of transferring information  
between the units.



Figure 1

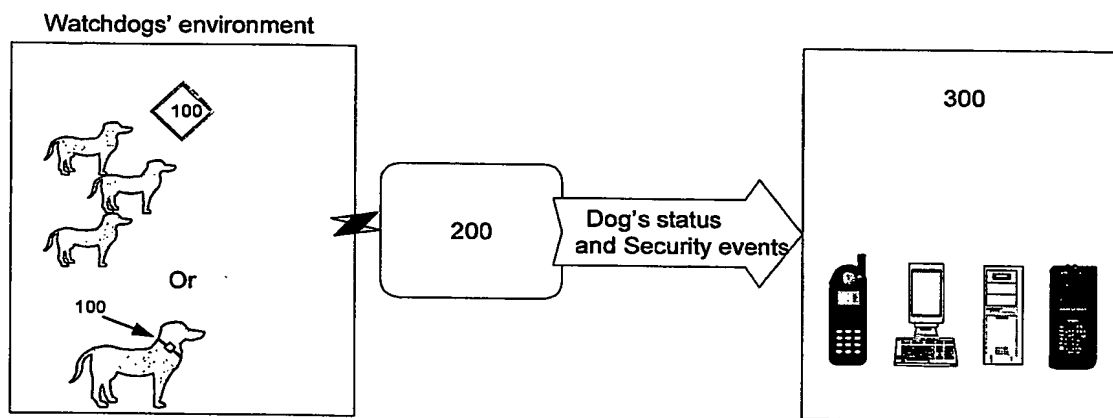


Figure 2



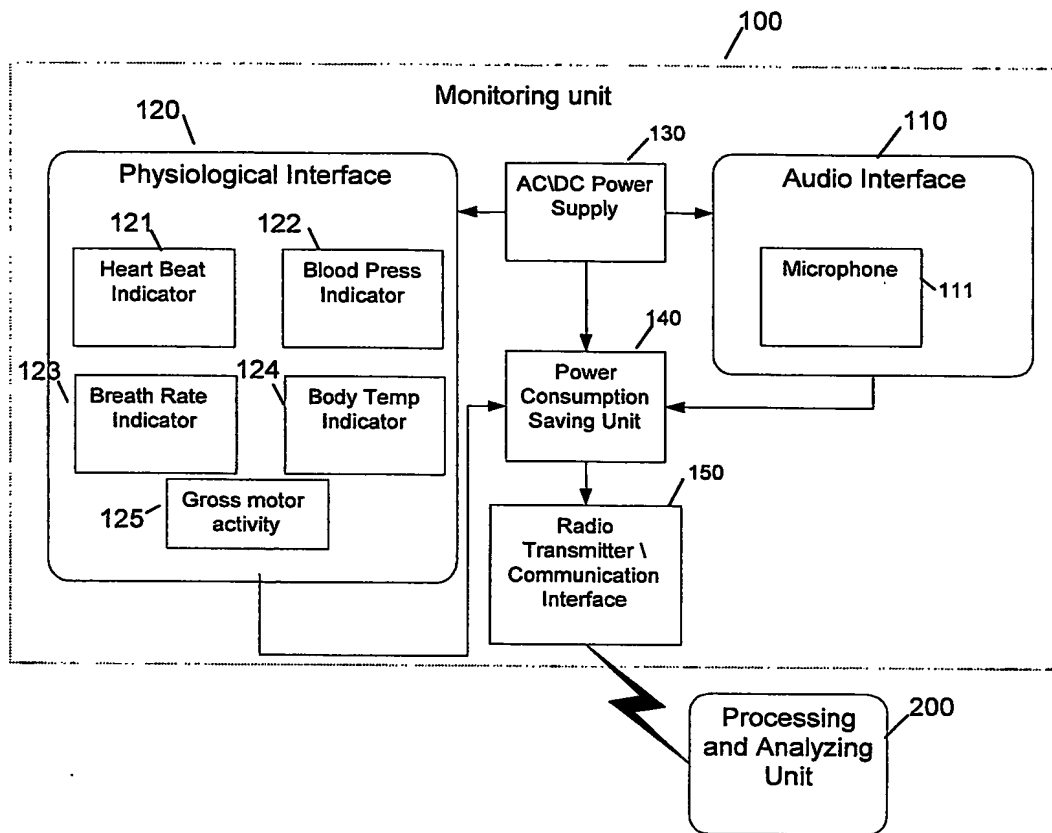


Figure 3

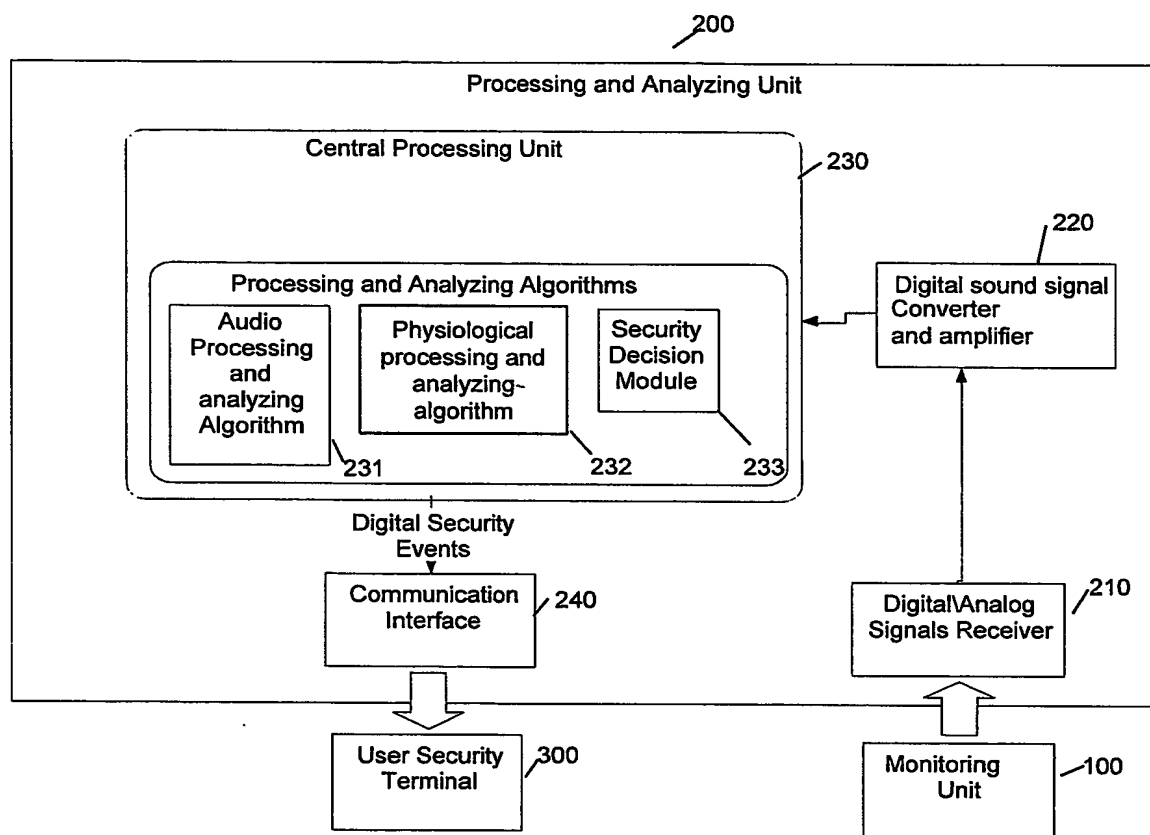

10/528072

Figure 4

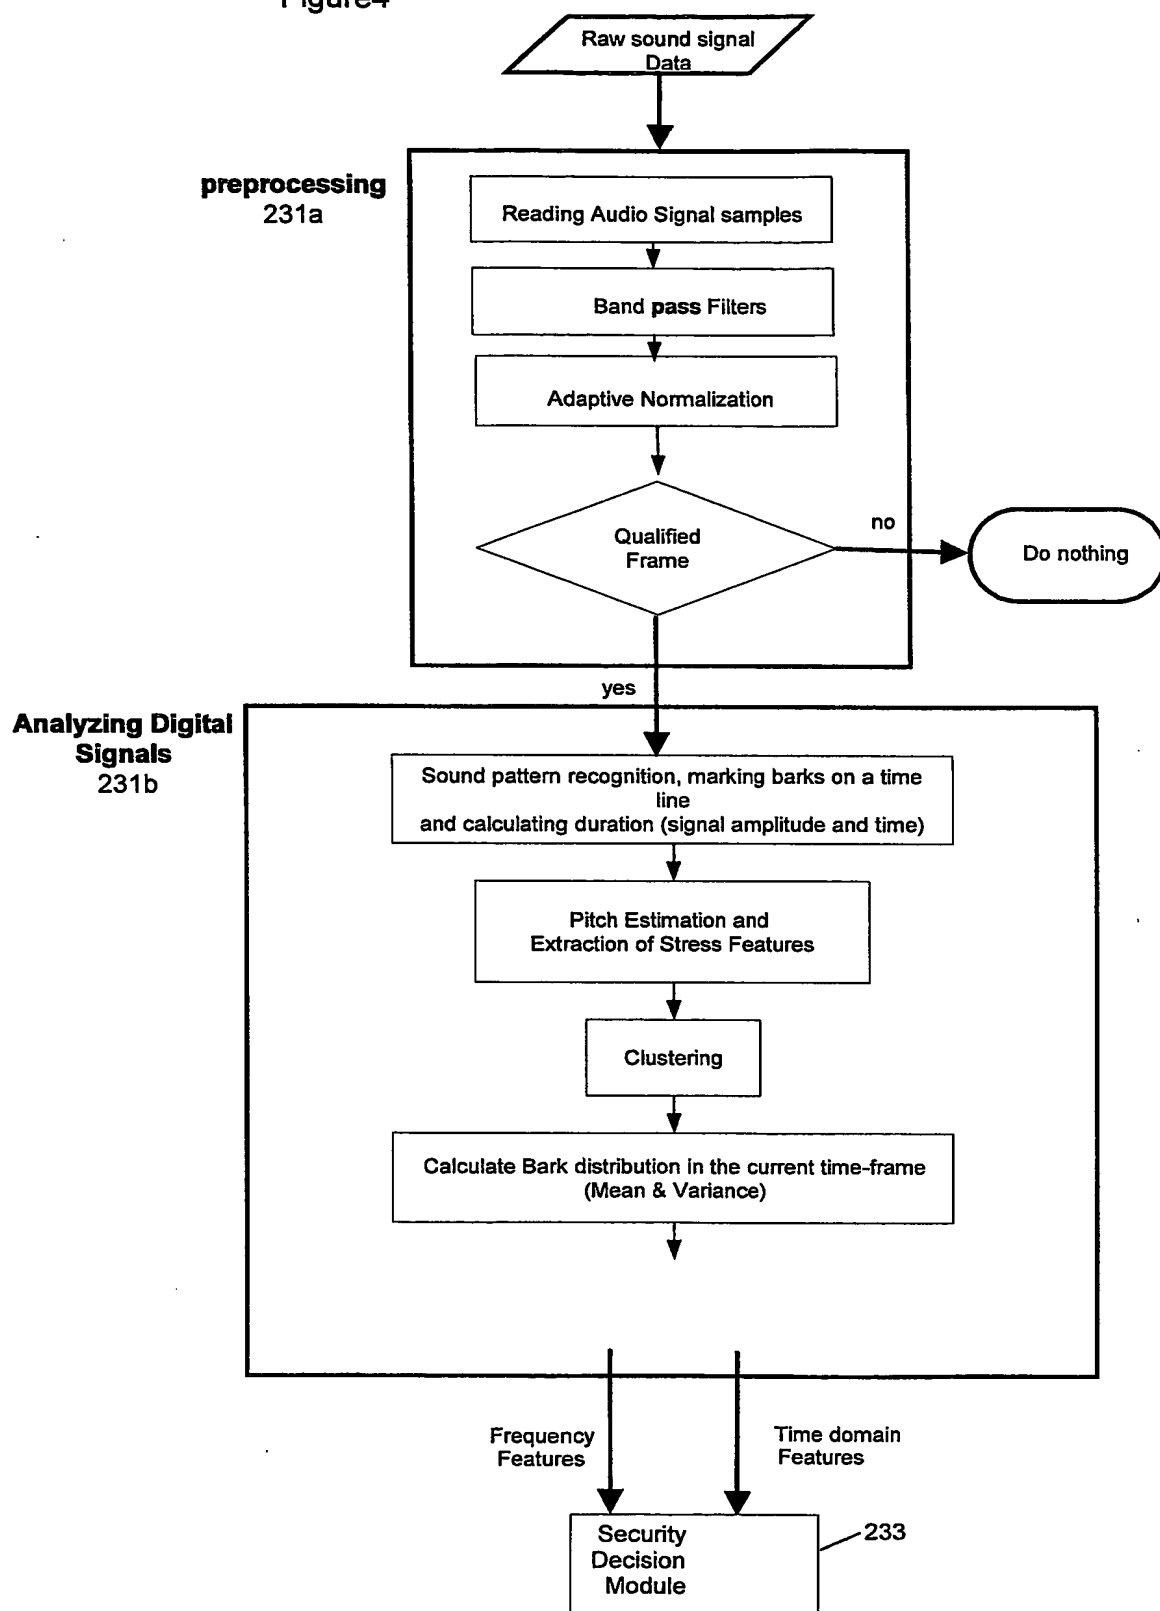

10/528072

Figure 5

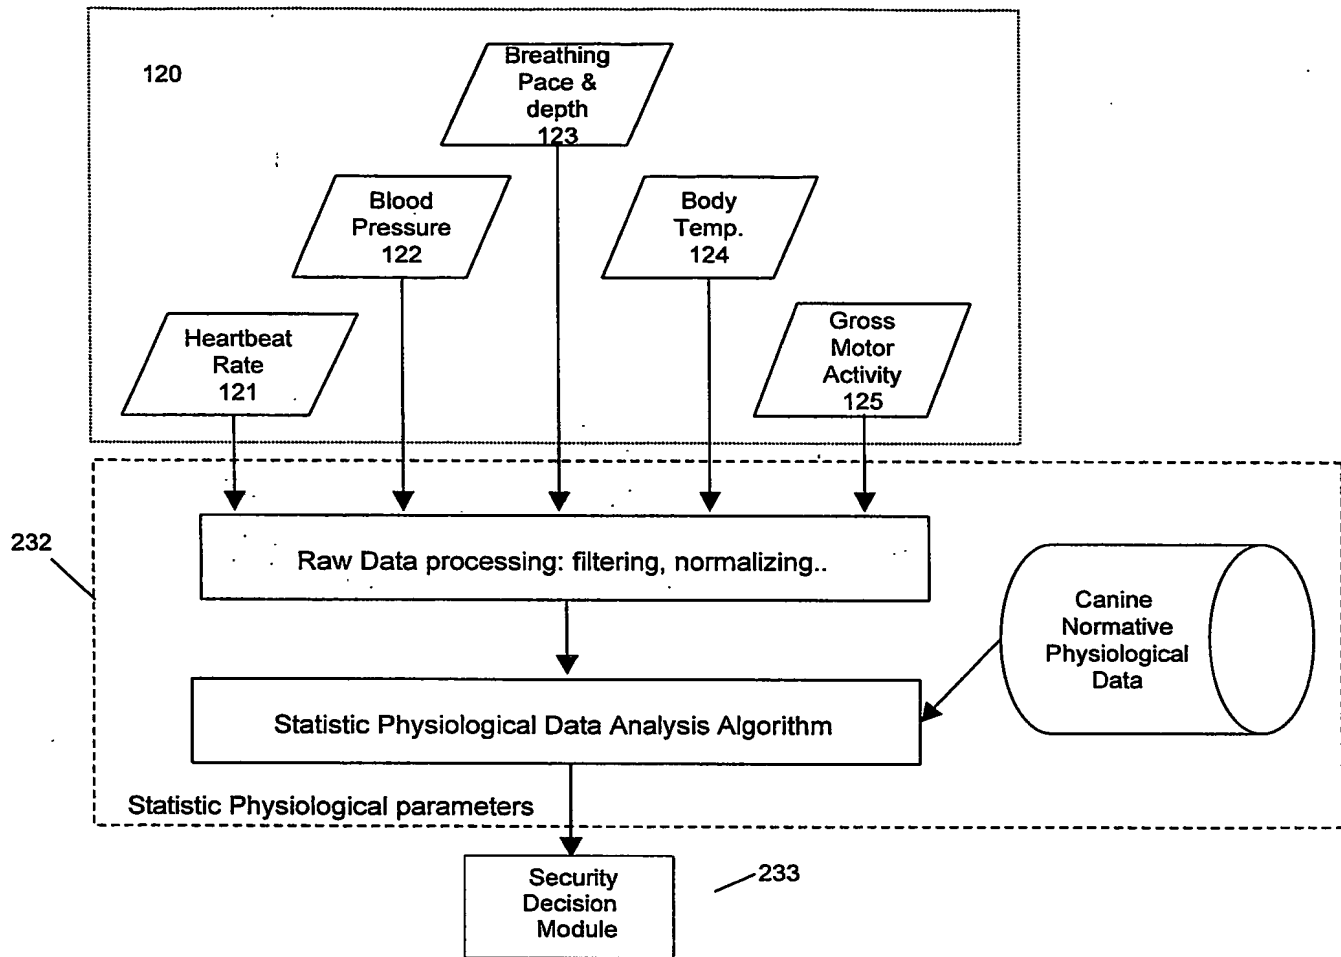


Figure 6

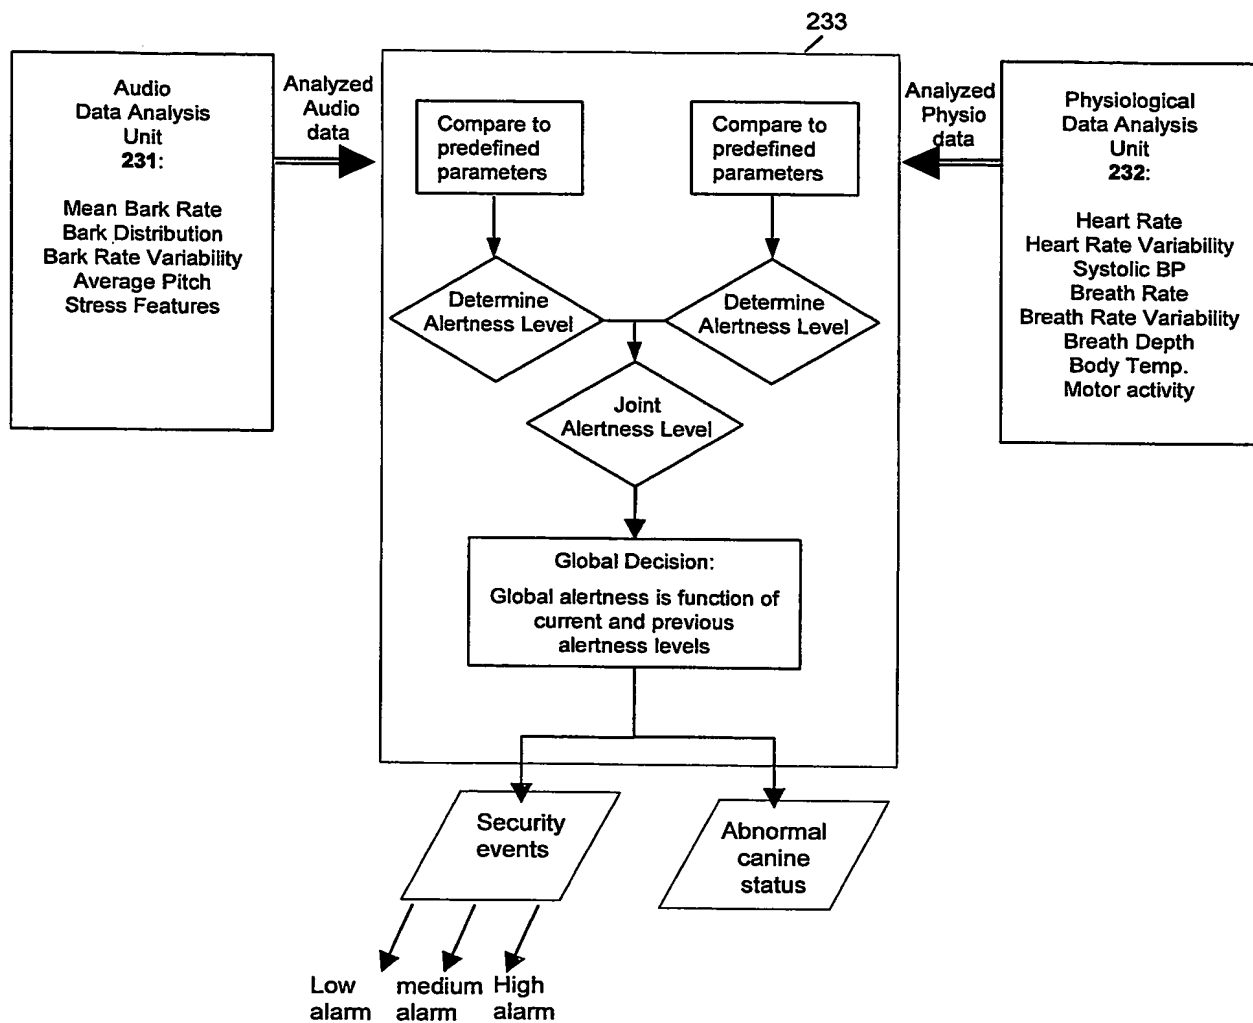


Figure 7

